




DELTRAN Battery Tender® BT-TWIN 800  
International Battery Charger Installation Instructions




**Weight and Mounting Hardware** – The BT-Twin 800 International battery charger is not designed to be mounted permanently on any surface. It has no mounting flanges or specific attachments points that facilitate the use of special mounting hardware. However, it does have 4 non-skid pads under its base so that the unit can sit on a level surface, like a table or work bench, and not move excessively while being used. **The BT-Twin 800 is also very light. Weight without cables = 1.75 pounds.**



Dimensions: Length = 8.8”(224 mm), Width = 6.0”(152 mm), Height = 6.6” (165 mm)

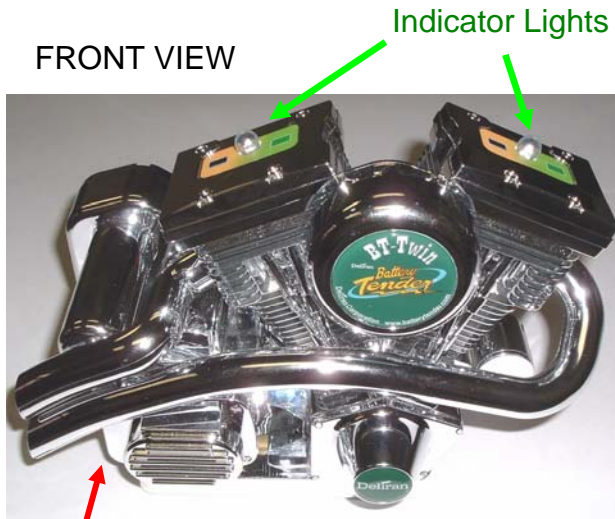

AC INPUT MODULE ON LOWER LEFT

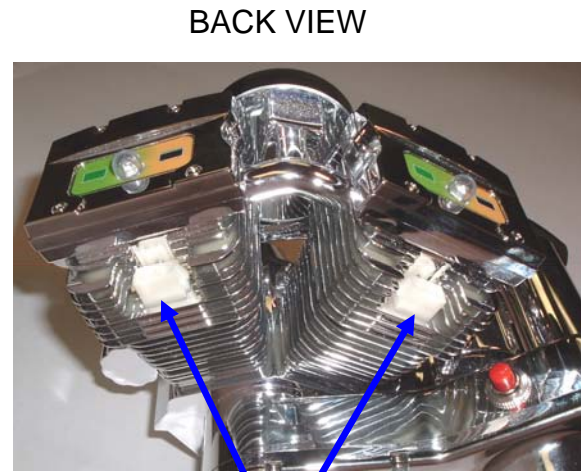

DC OUTPUT CONNECTORS

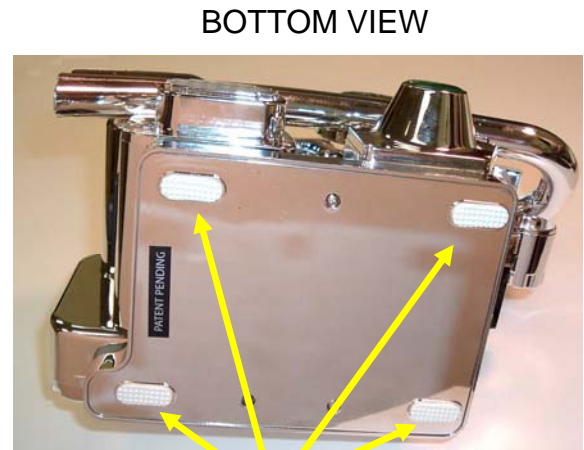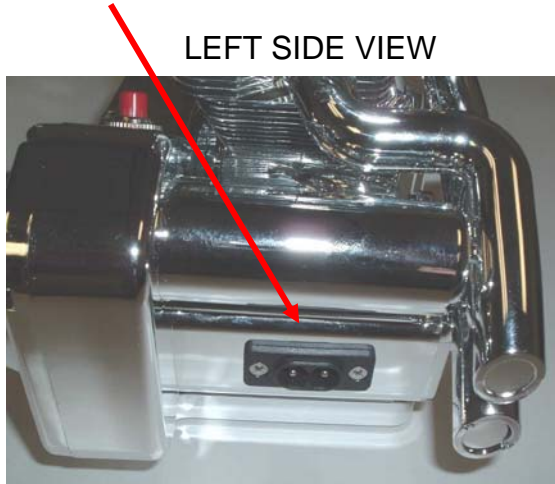

NON-SKID PADS (4 Places)

**Caution** – The BT-Twin 800 housing is a unique replica of the popular V-Twin motorcycle engine, making it an interesting display item, as well as being a highly effective battery charger capable of charging two batteries at the same time. However, this unique configuration does introduce some increased risk of cosmetic damage to the housing. To minimize that risk, please exercise caution when handling the BT-Twin 800. Also, do not forget that this is an electrical appliance. Always use caution when handling appliances that are connected to AC power, or any other type of electrical power source.